



TRX 特锐祥
专注电容器材料

	SMD- 1 SMD 1 . .		
	/N		/D
	/E		/P




SM 1		S . .	
/N		/D	
/E		/P	

1. /P N

T G 1 102 K

2. /P


--	--

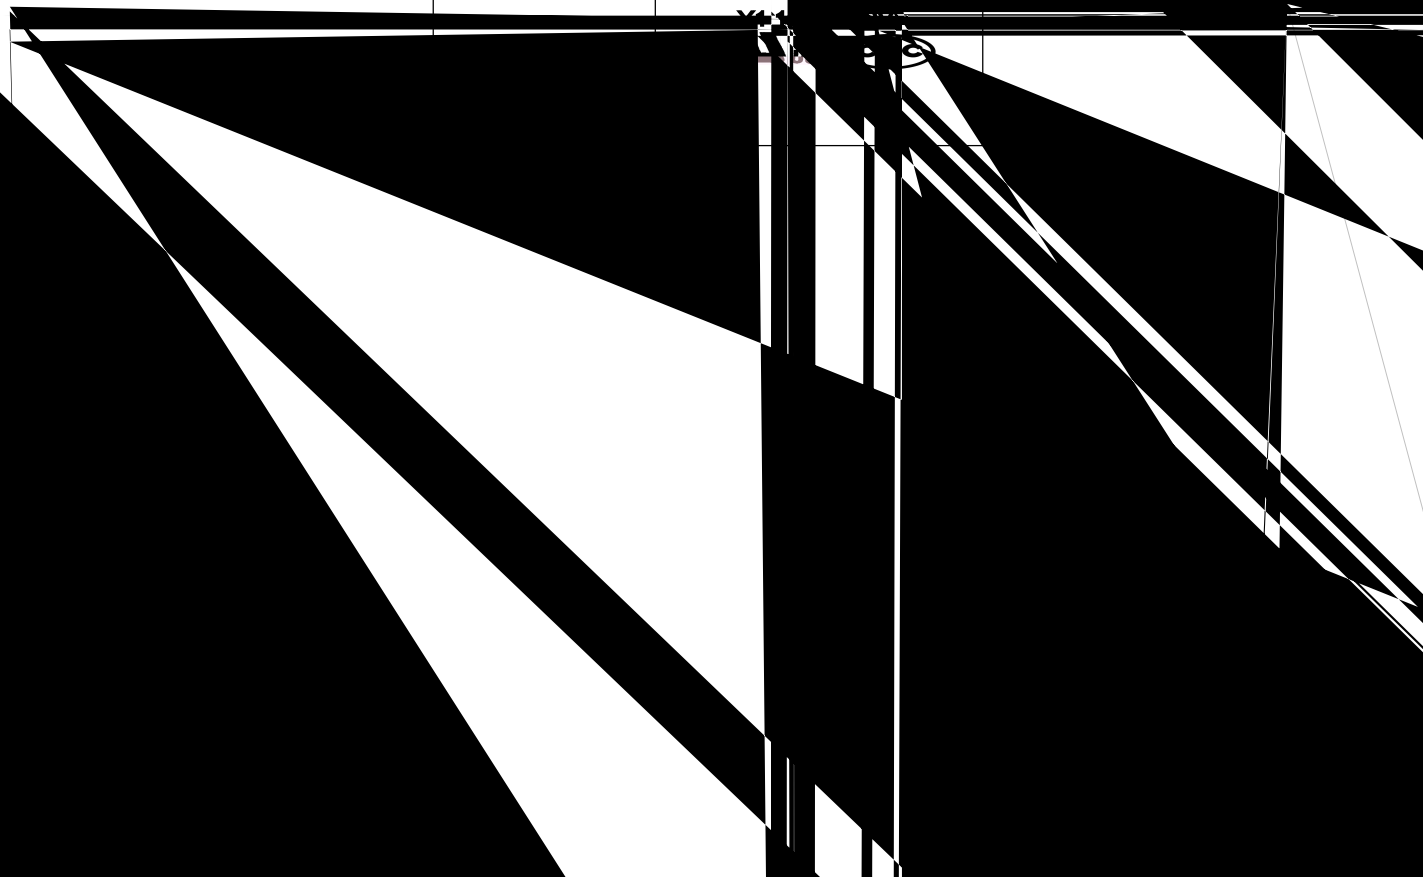



/N

SMD- 1
SMD 1 . .

 TRX 专注电容器廿年	SMD- 1		
	SMD 1 . .		
	/N		/D
/E		/P	

/

/

7. /P



SMD- 1
SMD 1 . .

/N

/D

/E

/P



SMD- 1
SMD 1 . .

/N

/D

/E

/P

±




SMD- 1
SMD 1 . .

/N

/D


/E

/P

 TRX 专注电容器廿年	SMD- 1 SMD 1 . .		
	/N		/D
	/E		/P

			± ±
			± ±
			± ±
			± ±
			± ±

8. /C

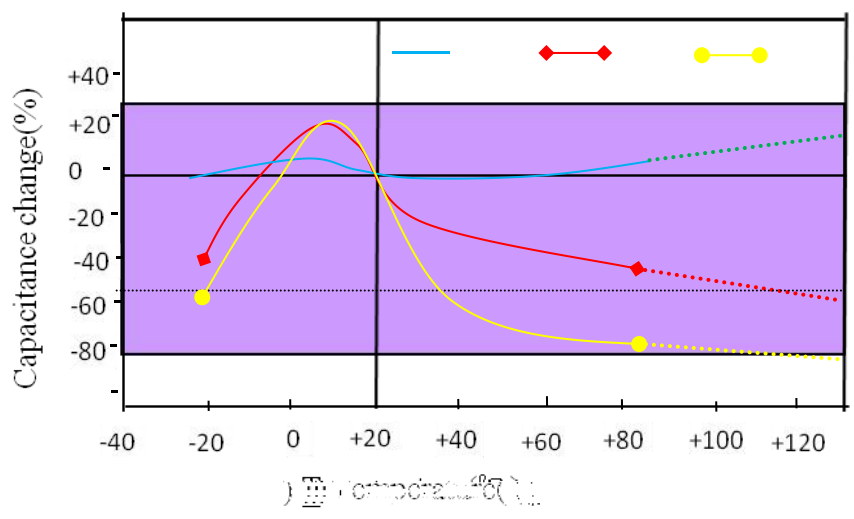



SMD- 1
SMD 1 . .

/N		/D	
/E		/P	

9. /C

R HS H.F.
REACH

10. /S

/

/N


/D

/E

/P


11. /P

/

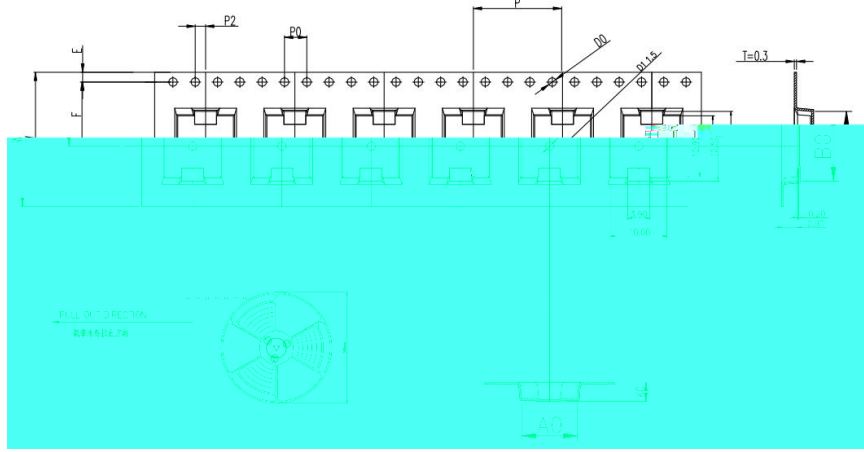

ITEM	W	A0	B0	K1	K0	P	F	E	D0	D1	P0	P2	T
DIM	24.0	$^{+0.30}_{-0.30}$	$^{+0.10}_{-0.10}$	$^{+0.10}_{-0.10}$	$^{+0.10}_{-0.10}$	$^{+0.10}_{-0.10}$	$^{+0.10}_{-0.10}$	$^{+0.10}_{-0.10}$	$^{+0.10}_{-0.00}$	$^{+0.10}_{-0.00}$	$^{+0.10}_{-0.10}$	$^{+0.10}_{-0.10}$	$^{+0.05}_{-0.05}$
ALTERNATE													


/

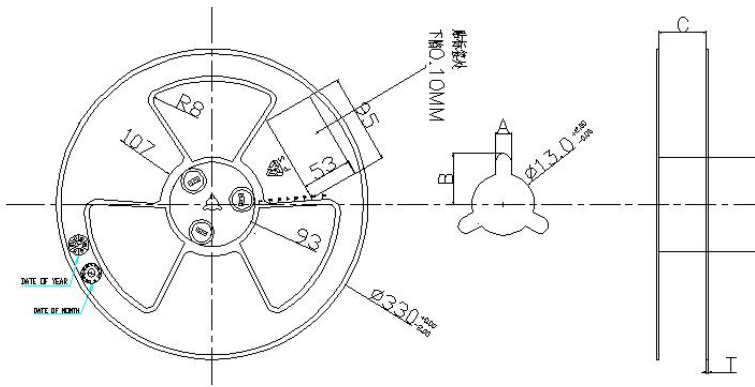


SPEC	A±0.3	B±0.5	C $^{+0.5}_{-0.0}$	D±0.5	T±0.2
24	2.3	10.75	24.4	Ø97	2.2

/


Item	Data	Remark
Cover tape adhesion	10 ~ 100g	Carrier tape and cover tape open angle 165 ~ 180° F=300± 5mm/minute

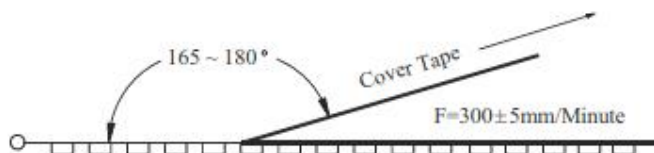

 TRX 专注电容器廿年	SMD- 1		
	SMD 1 . .		
	/N		/D
		/P	

/ -





TRX 特锐祥
TGY1102K




TRX Des: TRX-SMD Y. CAP
P/N: /
(M) Mfr: TGY1102K
D/C: 2021.11.15
LOT. NO: BSC2108015002
QTY: 1000 PCS
SPEC: SMD-Y115P102K/AC400V






Caution LEVEL


/O -

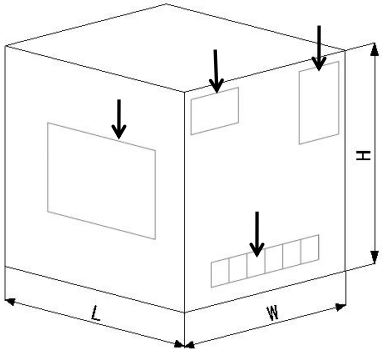


Dimensions: L, W, H



TRX 特锐祥
专注电容器







/


/


/

/P :









/

/

" "

R

