

<p>FACE MO N CHO K BA IE EC IFIE</p>	<p>- 20 200 -5.0 A</p>
<p><u>DO-214AC/ MA</u></p> <p style="text-align: center;"><i>Dimensions in inches and (millimeters)</i></p>	<p>F</p> <p>◀ F</p> <p>◀ F</p> <p>◀ B - ,</p> <p>◀ L</p> <p>◀ H</p> <p>◀ H</p> <p>250°C/10</p> <p>M D</p> <p>: M</p> <p>: M 2026 ,</p> <p>: P</p> <p>: 0.0023 : A , 0.07</p> <p style="text-align: right;">MIL- D-750,</p>

25°C	20%	60H ,							
M			20	40	60	80	100	150	200
M	M		14	28	42	56	70	105	140
M	DC		20	40	60	80	100	150	200
M	=100°C	I	5.0						A
P	, 8.3	I	120.0						A
M	5.0A		0.55	0.70	0.85	0.95			
M	DC =25°C DC =125°C	I	0.5 50		0.05 10		mA		
			80.0						°C/
O			-55 +150						°C
			-55 +150						°C

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

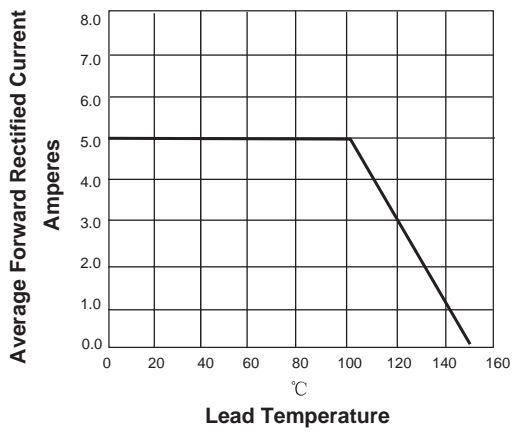


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

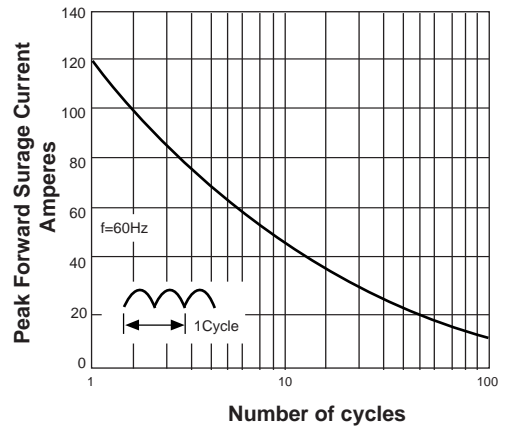


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

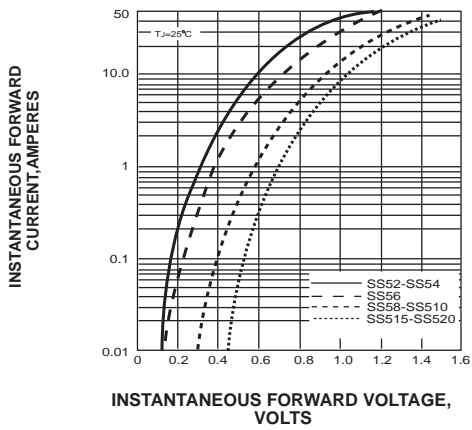


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

